

## Display and display drive circuit or display drive method

**Patent number:** US2002180719

**Publication date:** 2002-12-05

**Inventor:** NAGAI YOSHIFUMI (JP); TSUJI RYUHEI (JP)

**Applicant:**

**Classification:**

- **international:** G09G5/00

- **european:** G09G3/32

**Application number:** US20020088401 20020722

**Priority number(s):** JP20000230095 20000728; JP20000230624 20000731


**Also published as:**

EP1306827 (A1)  
WO0211116 (A1)  
CA2384623 (A1)

[Report a data error here](#)

### Abstract of US2002180719

Each horizontal driving section (3) and a driving control section (4) of a display apparatus have a data communicating function. The driving control section has a first communicating section (5) receiving data from external and a second communicating section (6) communicating data with each horizontal driving section (3). The second communicating section (6) adds individual identification information (23) for identifying each horizontal driving section (3) to the transferred data, and transfers the data in packet format. The horizontal driving section (3) receives the data packet for it based on the identification information (23), and performs current driving for a display section (1). The driving control section adds the individual identification information to the control data to be transferred to each horizontal driving section (3) corresponding to connecting form of the horizontal driving sections (3), and transfers the control data not concerned with connecting order of the horizontal driving sections (3); The horizontal driving section (3) side performs a receiving process and lighting operation.

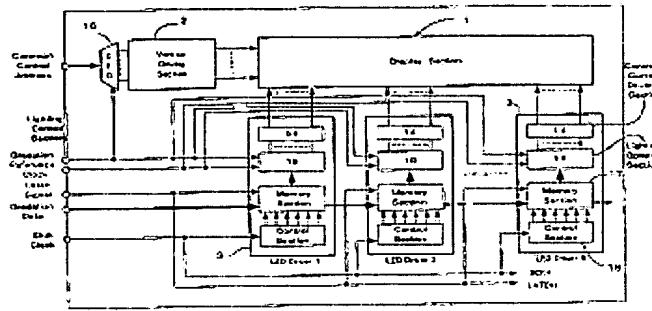

Data supplied from the **esp@cenet** database - Worldwide